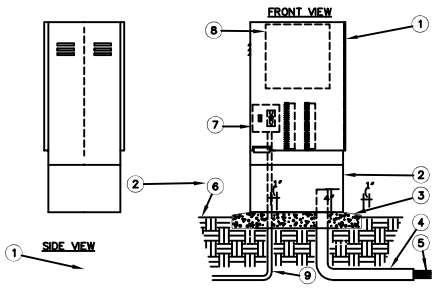

LEGEND

1. CONTROLLER ENCLOSURE.
2. OPTIONAL PEDESTAL.
3. POURED CONCRETE BASE. – 6" MIN. THICKNESS – EXTEND 6" BEYOND OUTSIDE DIMENSIONS OF ENCLOSURE WITH 1/2% SLOPE FOR DRAINAGE.
4. PVC LONG SWEEP ELL – USE ONE SWEEP ELL PER CONTROLLER.
5. DIRECT BURIAL CONTROL WIRES TO CONTROL VALVES.
6. FINISH GRADE.
7. CONTROLLER SUB–ASSEMBLY (CSA) INCLUDES GFI & TERMINAL STRIPS WITH PLACARDS.
8. AUTOMATIC CONTROLLER.
9. 120–VOLT SERVICE IN CONDUIT.

CONTROLLER ENCLOSURE

N.T.S.

SB_XXD